

PRB CRÉPIMUR F/M/G

STRUCTURED FIREPROOF ORGANIC COATING

Benefits of the PRB CRÉPIMUR F/M/G

-  Protects and decorates exterior walls
-  Matt finish
-  Creates a smoothed, rolled or roughcast finish
-  Fine (F), medium (M) or coarse (G) grain size
-  Ready to use



KEY PRODUCT INFORMATION

- Recycled plastic tubs of 8kg and 25kg.
- 0.480 t pallet, i.e. 24no 20 kg tubs.

CONSUMPTION/USE

- Depending on the finish and grain size.
- Consumption is expressed in kg/m².

FLOAT-FINISH

- **PRB CRÉPIMUR F:** Approx. 10 – 12 m² per 25kg tub based upon 2.1 to 2.5 kg/m².
- **PRB CRÉPIMUR M:** Approx. 9 – 11 m² per 25kg tub based upon 2.6 to 3.5 kg/m².
- **PRB CRÉPIMUR G:** Approx. 5 – 7 m² per 25kg tub based upon 3.5 to 5 kg/m².

COLOUR: PRB Harmony colour chart colours.

STORAGE: 24 months – Store inside in cool, frost free and dry conditions. Avoid extreme temperatures, storing in direct sunlight or in site storage containers where the material can be affected by heat build up or cold. Warm material will be difficult to apply and is likely to cure before works can be completed. This can become more exacerbated if applied to a wall heated by the sun.

PRB CRÉPIMUR F:

EN 1062-1: G₃ E₅ S₃ V₂ W₃ A₀ C₀

PRB CRÉPIMUR M:

EN 1062-1: G₃ E₅ S₃ V₂ W₃ A₀ C₀

PRB CRÉPIMUR G:

EN 1062-1: G₃ E₅ S₄ V₂ W₃ A₀ C₀



USAGE GUIDE

WHERE TO USE?

- **PRB CRÉPIMUR** can be used as a finishing coat for both renovation work and new builds.

SUITABLE SUBSTRATES

Outdoor surfaces:

- ✓ Cast-in-place and levelled concrete, precast panels, traditional render or one coat renders.

Indoor surfaces:

- ✓ All the above-mentioned outdoor surfaces as well as gypsum-based surfaces (tiles, plaster, levelling plaster, etc.).

UNSUITABLE SUBSTRATES

- ✗ Surfaces exposed to rising damp by capillary action (e.g. baseboards and plinths).
- ✗ Horizontal or sloping surfaces (<45%) exposed to rain (windowsills, balconies, etc.).
- ✗ Floors

APPLICATION CONDITIONS

PRB CRÉPIMUR must not be applied:

- In temperatures below 5°C and above 30°C.
- On frozen, freezing or thawing substrates.
- On damp masonry or in rain/mist/fog (high humidity: above 80% RH)
- In hot, dry winds (accelerated evaporation results in the product drying too quickly).
- The substrate must be dry, with a maximum moisture content of 5%.
- When it is damp – Wash off is likely to occur.
- Do not apply if there is a possibility of rainfall before curing, as wash off could occur.
- On damp substrates as permanent or intermittent surface blistering can occur – (this can appear after initial drying or after rainfall).


TECHNICAL

COMPOSITION

- Water-based acrylic copolymer.
- Mineral fillers.
- Encapsulated film protecting agent.
- Specific additives.
- Water.

PRODUCT CHARACTERISTICS

- Density: 1.8 ± 0.05 .
- pH: 8.5 ± 0.5 .
- Dry extract: $85 \pm 2\%$.
- Grain size:
PRB CRÉPIMUR F ~ 1 mm.
PRB CRÉPIMUR M ~ 1.5 mm.
PRB CRÉPIMUR G ~ 2 mm.

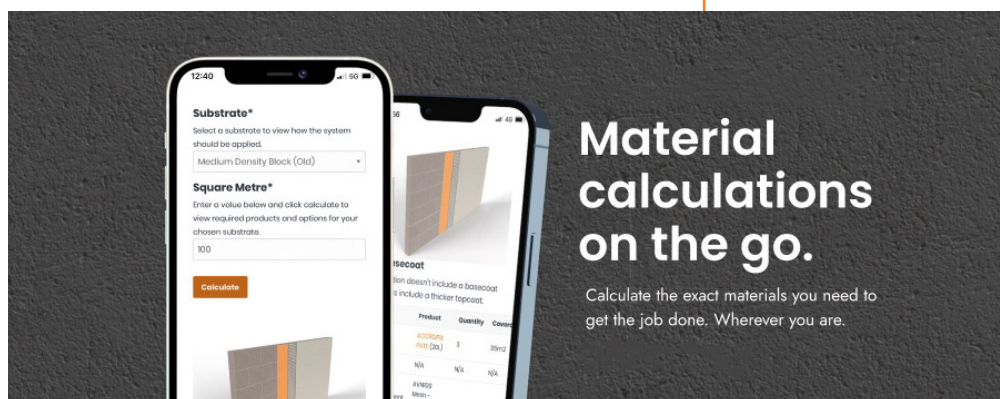

SCAN THE QR CODE BELOW
TO FIND THE MATERIAL
QUANTITY NEEDED



APPLICATION

PREPARING THE SURFACE

- **PRB CRÉPIMUR** must be applied to flat, dry, clean, sound and solid substrates, free of any dust or traces of formwork removal oil.
- For non-waterproof exterior substrates such as rough masonry (bricks, breezeblocks, etc.): apply an undercoat using **PRB SC GRIS**, **PRB CLASSIC TAL**, **PRB TRADITIONNEL 160**, **PRB TRADICLAIR 190 L**, **PRB CLASSIC F** or **PRB TRADICLAIR PR 170**. Allow to dry for at least 1 month before applying **PRB CRÉPIMUR** and **PRB CRÉPIMUR**.
- For levelled concrete, allow the coating to dry for at least 1 month before applying **PRB CRÉPIMUR** and **PRB CRÉPIMUR**.
- The upper edges of vertical surfaces must be protected (flashing, copings, etc.).
- For large surfaces, to avoid the risk of reworking, the surface to be coated should be divided into smaller sections so that the entire surface can be coated without any gaps.

INTERIOR OR EXTERIOR PREPARATION WORK

- All substrates must be treated with the **PRB CRÉPIMUR** regulating primer, in the same colour as the finish, using 300 g/ m².
- For absorbent or chalky substrates: Pre-treat with the **PRB CRÉPIMUR** primer using 150 to 200 g/m².

APPLICATION

- **PRB CRÉPIMUR** is ready to use. Do not mix with anything, as this will invalidate the manufacturer's guarantee.
- Mix the contents thoroughly using a low speed paddle mixer before applying.
- **PRB CRÉPIMUR** can be applied with a plastic or stainless-steel trowel, a foam or wool roller, or a rubber roller with decorative embossing (e.g. oak leaf) depending on the desired finish.

NB: Tools should be cleaned with cold water.

FINISH

The finish depends on the tool used:

- **Smooth finish:** plastic smoothing trowel • Rolled finish: foam roller, wool roller, oak leaf embossed roller.
- **Roughcast finish:** stainless-steel smoothing trowel – this is applied to **PRB CRÉPIMUR** with a rolled finish – wait for it to start curing (the product should still be wet but not sticky), so that the bumps from the roller can be flattened by moving the stainless steel smoothing tool from top to bottom.

Please note:

- To avoid shading, we recommend using a single manufacturing batch (with the same use-by date) for the same facade or finishing at natural stops/ edges.
- Shading (e.g. rework) may be experienced if there are temperature variations during application.

HEALTH AND SAFETY

- Not harmful during normal use but check for any allergic reactions. Wear suitable protective clothing, gloves and eye/face protection.
- Generally considered non hazardous.
- In case of contact with eyes, rinse immediately with plenty of water and seek medical help. After contact with skin, wash immediately with plenty of soap and water.
- Keep out of the reach of children.
- For further information, please read the Material Safety Data Sheet for this product.

Technical sheet – June 2026

The only purpose of this technical data sheet is to inform customers about the product and its specific uses. The information it contains is based on current knowledge and experience. The end user must carry out a representative test to ensure the product is suitable for their specific application and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Our general terms and conditions of sale shall prevail, and the end user should check to ensure this document has not been replaced by a more updated version.

01242 524228

technical@prbsystems.co.uk

www.prbsystems.co.uk

Montis Court, Bouncers Lane, Cheltenham, GL52 5JW